

# RS3AB THRU RS3MB

## Surface Mount Fast Recovery Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 3 A

### FEATURES


- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

- Case: SMB
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.098g / 0.003oz

### PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

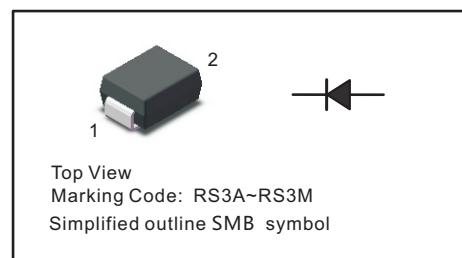

### Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.


| Parameter                                                                                                                       | Symbols                            | RS3AB      | RS3BB | RS3DB | RS3GB | RS3JB | RS3KB | RS3MB | Units              |  |  |  |
|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------|-------|-------|-------|-------|-------|-------|--------------------|--|--|--|
| Maximum Repetitive Peak Reverse Voltage                                                                                         | $V_{RRM}$                          | 50         | 100   | 200   | 400   | 600   | 800   | 1000  | V                  |  |  |  |
| Maximum RMS voltage                                                                                                             | $V_{RMS}$                          | 35         | 70    | 140   | 280   | 420   | 560   | 700   | V                  |  |  |  |
| Maximum DC Blocking Voltage                                                                                                     | $V_{DC}$                           | 50         | 100   | 200   | 400   | 600   | 800   | 1000  | V                  |  |  |  |
| Maximum Average Forward Rectified Current                                                                                       | $I_{F(AV)}$                        | 3          |       |       |       |       |       |       | A                  |  |  |  |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load                                              | $I_{FSM}$                          | 90         |       |       |       |       |       |       | A                  |  |  |  |
| Maximum Forward Voltage at 3 A                                                                                                  | $V_F$                              | 1.3        |       |       |       |       |       |       | V                  |  |  |  |
| Maximum DC Reverse Current $T_a = 25 \text{ }^\circ\text{C}$<br>at Rated DC Blocking Voltage $T_a = 125 \text{ }^\circ\text{C}$ | $I_R$                              | 5<br>100   |       |       |       |       |       |       | $\mu\text{A}$      |  |  |  |
| Typical Junction Capacitance at $V_R=4\text{V}$ , $f=1\text{MHz}$                                                               | $C_j$                              | 40         |       |       |       |       |       |       | pF                 |  |  |  |
| Maximum Reverse Recovery Time <sup>(1)</sup>                                                                                    | $t_{rr}$                           | 150        |       |       | 250   | 500   |       |       | ns                 |  |  |  |
| Typical Thermal Resistance <sup>(2)</sup>                                                                                       | $R_{\theta JA}$<br>$R_{\theta JC}$ | 48<br>16   |       |       |       |       |       |       | $^\circ\text{C/W}$ |  |  |  |
| Operating and Storage Temperature Range                                                                                         | $T_j, T_{stg}$                     | -55 ~ +150 |       |       |       |       |       |       | $^\circ\text{C}$   |  |  |  |

( 1 ) Measured with  $I_F = 0.5 \text{ A}$ ,  $I_R = 1 \text{ A}$ ,  $I_{rr} = 0.25 \text{ A}$ .


( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

# RS3AB THRU RS3MB


**Fig.1 Maximum Average Forward Current Rating**

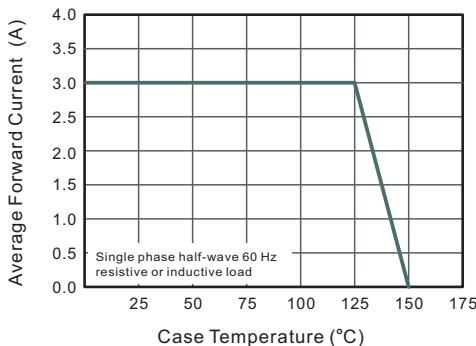


**Fig.2 Typical Reverse Characteristics**

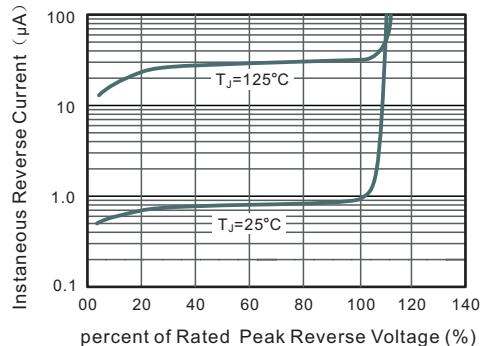


**Fig.3 Typical Instantaneous Forward Characteristics**

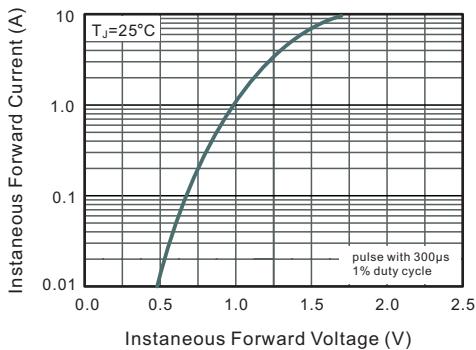

**Fig.4 Typical Junction Capacitance**

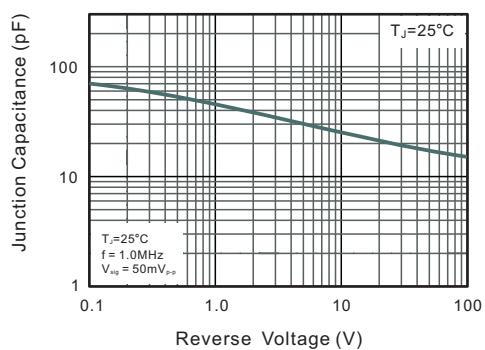

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

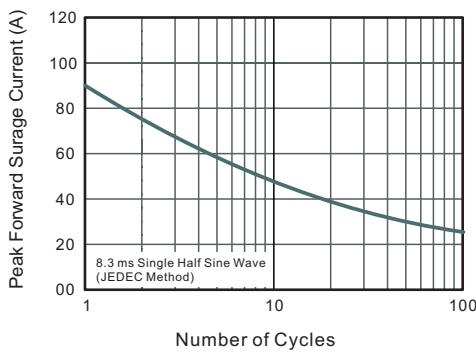


# RS3AB THRU RS3MB

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SMB

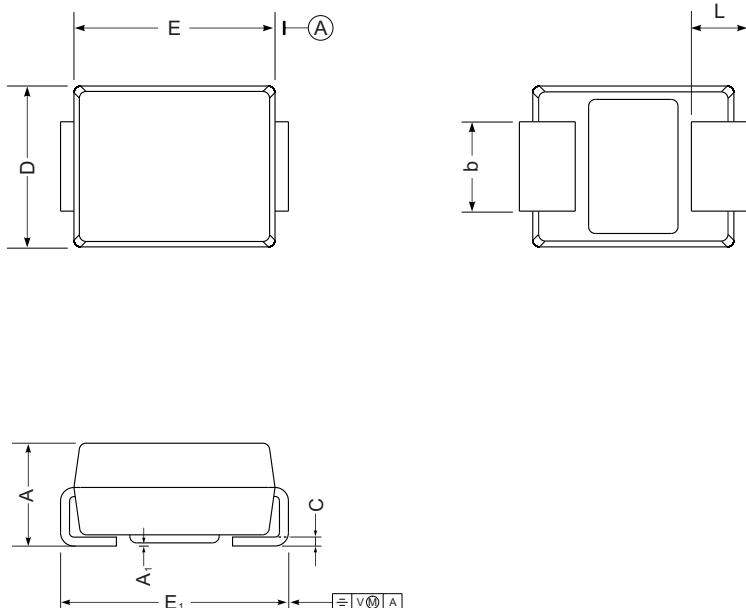

SMB mechanical data

| UNIT |     | A    | E    | D    | $E_1$ | $A_1$ | L   | C     | b   |
|------|-----|------|------|------|-------|-------|-----|-------|-----|
| mm   | max | 2.44 | 4.70 | 3.94 | 5.59  | 0.20  | 1.5 | 0.305 | 2.2 |
|      | min | 2.13 | 4.06 | 3.3  | 5.08  | 0.05  | 0.8 | 0.152 | 1.9 |
| mil  | max | 96   | 185  | 155  | 220   | 7.9   | 59  | 12    | 87  |
|      | min | 84   | 160  | 130  | 200   | 2.0   | 32  | 6     | 75  |

## The recommended mounting pad size

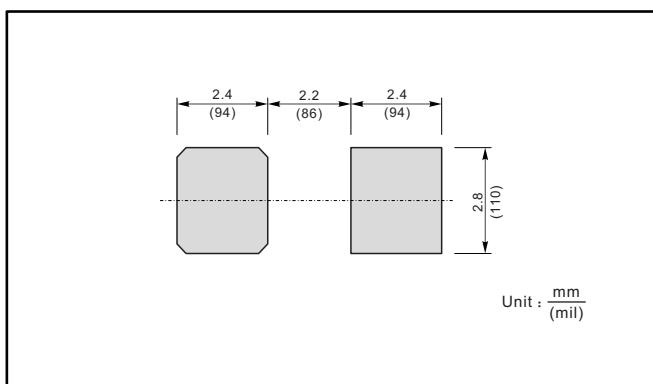

## Marking

| Type number | Marking code |
|-------------|--------------|
| RS3AB       | RS3A         |
| RS3BB       | RS3B         |
| RS3DB       | RS3D         |
| RS3GB       | RS3G         |
| RS3JB       | RS3J         |
| RS3KB       | RS3K         |
| RS3MB       | RS3M         |