

SOT-89-3L Encapsulate Three-terminal Voltage Regulators


78L08 Three-terminal positive voltage regulator

FEATURES

- Maximum output current I_{OM} : 0.1A
- Output voltage V_O : 8V
- Continuous total dissipation P_D : 0.6 W ($T_a = 25^\circ C$)

SOT-89-3L

1. OUT
2. GND
3. IN



ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	30	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	166.7	°C/W
Operating Junction Temperature Range	T_{OPR}	-25~+125	°C
Storage Temperature Range	T_{STG}	-65~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=14V$, $I_o=40mA$, $C_i=0.33\mu F$, $C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	V_o		25°C	7.7	8.0	8.3
		$10.5V \leq V_i \leq 23V$, $I_o=1mA \sim 40mA$	0-125°C	7.6	8.0	8.4
		$I_o=1mA \sim 70mA$		7.6	8.0	8.4
Load Regulation	ΔV_o	$I_o=1mA \sim 100mA$	25°C		18	mV
		$I_o=1mA \sim 40mA$	25°C		10	mV
Line regulation	ΔV_o	$10.5V \leq V_i \leq 23V$	25°C		42	mV
		$11V \leq V_i \leq 23V$	25°C		36	125
Quiescent Current	I_q		25°C		4	mA
Quiescent Current Change	ΔI_q	$11V \leq V_i \leq 23V$	0-125°C			mA
		$1mA \leq I_o \leq 40mA$	0-125°C		0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$	25°C		54	$\mu V/V_o$
Ripple Rejection	RR	$13V \leq V_i \leq 23V$, $f=120Hz$	0-125°C	37	46	dB
Dropout Voltage	V_d		25°C		1.7	V

* Pulse test.

TYPICAL APPLICATION

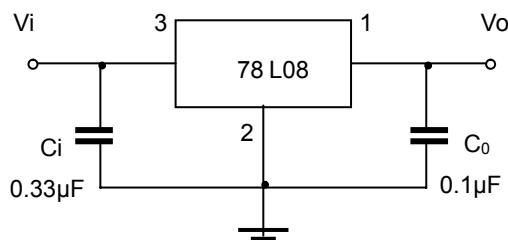

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics

