

MBR820CT THRU MBR8100CT



Reverse Voltage - 20 to 100 Volts Forward Current - 8.0 Ampere

SCHOTTKY BARRIER RECTIFIER

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds

TO-220AB

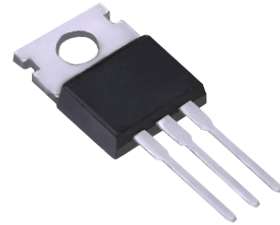

Mechanical Data

Case : JEDEC TO-220AB Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.080 ounce, 2.24 grams

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MBR 820CT	MBR 830CT	MBR 840CT	MBR 845CT	MBR 850CT	MBR 860CT	MBR 870CT	MBR 880CT	MBR 890CT	MBR 8100CT	UNITS
Marking Code											T	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	45	50	60	70	80	90	100	V
Maximum RMS voltage	V_{RMS}	14	21	28	32	35	42	49	56	63	70	V
Maximum DC blocking voltage	V_{DC}	20	30	40	45	50	60	70	80	90	100	V
Maximum average forward rectified current (see fig.1)	$I_{(AV)}$	8.0										A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150										A
Maximum instantaneous forward voltage at 8.0A	V_F	0.65			0.75			0.85			V	
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	1.0					50.0					mA
Typical junction capacitance (NOTE 1)	C_J	300.0					250					pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	3.0										°C/W
Operating junction temperature range	T_J	-50 to +125					-50 to +150					°C
storage temperature range	T_{STG}	-50 to +150										°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to case


MBR820CT THRU MBR8100CT

Reverse Voltage - 20 to 100 Volts Forward Current - 8.0 Ampere

Ratings And Characteristic Curves

AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

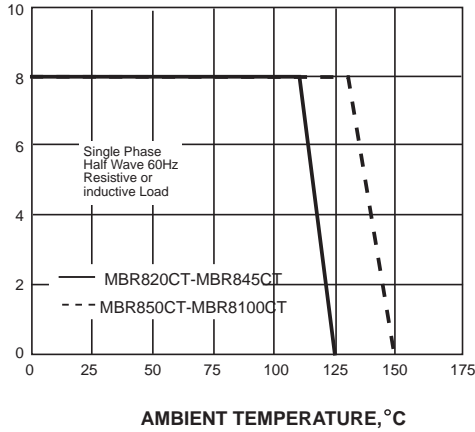

PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


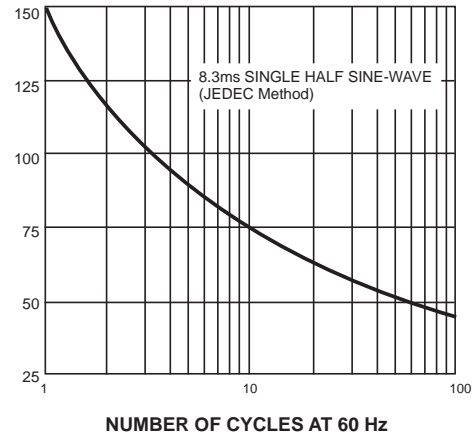


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

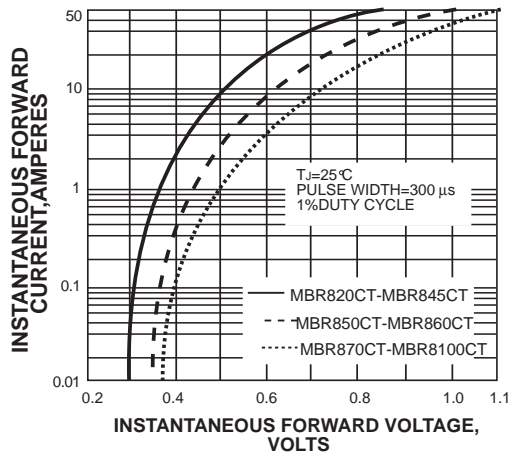

INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS



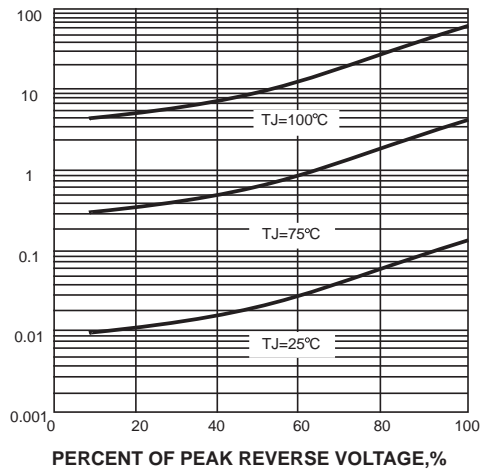


FIG. 5-TYPICAL JUNCTION CAPACITANCE

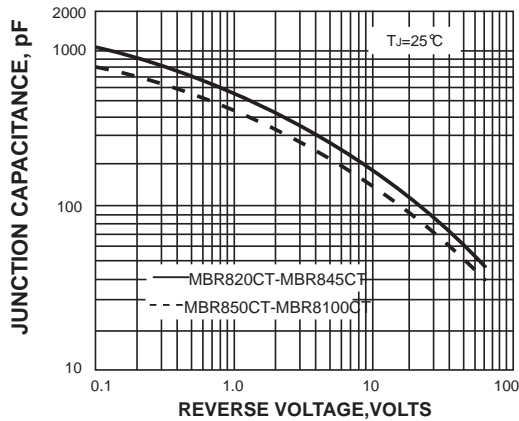

TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

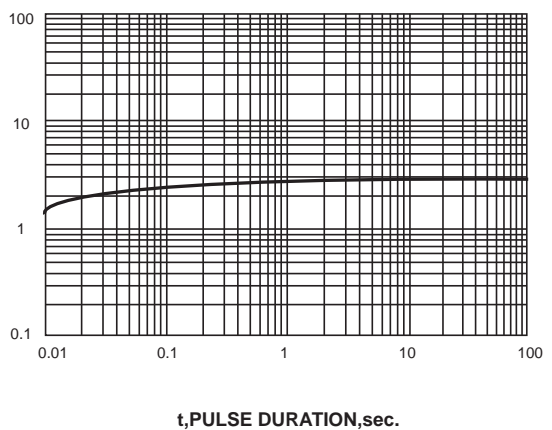

The curve above is for reference only.