

# MBRF3040CT~MBRF30200CT


## 30 AMPERES SCHOTTKY BARRIER RECTIFIERS

|         |                 |
|---------|-----------------|
| VOLTAGE | 40 to 200 Volts |
| CURRENT | 30 Amperes      |

### FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-0.
- Flame Retardant Epoxy Molding Compound.
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency.
- High current capability
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- Lead free in comply with EU RoHS 2011/65/EU directives

TO-220F



### MECHANICAL DATA

- Case: TO-220F molded plastic
- Terminals: solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- Mounting Position: Any



### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%


| PARAMETER   | SYMBOL          | MBRF<br>3040CT | MBRF<br>3045CT | MBRF<br>3050CT | MBRF<br>3060CT | MBRF<br>3080CT | MBRF<br>3090CT | MBRF<br>30100CT | MBRF<br>30150CT | MBRF<br>30200CT               | UNITS |  |  |  |  |  |  |
|---|-----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-------------------------------|-------|--|--|--|--|--|--|
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$       | 40             | 45             | 50             | 60             | 80             | 90             | 100             | 150             | 200                           | V     |  |  |  |  |  |  |
| Maximum RMS Voltage   | $V_{RMS}$       | 28             | 31.5           | 35             | 42             | 56             | 63             | 70              | 105             | 140                           | V     |  |  |  |  |  |  |
| Maximum DC Blocking Voltage   | $V_{DC}$        | 40             | 45             | 50             | 60             | 80             | 90             | 100             | 150             | 200                           | V     |  |  |  |  |  |  |
| Maximum Average Forward Current   | $I_{F(AV)}$     | 30             |                |                |                |                |                |                 |                 | A                             |       |  |  |  |  |  |  |
| Peak Forward Surge Current : 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)           | $I_{FSM}$       | 220            |                |                |                |                |                |                 |                 | A                             |       |  |  |  |  |  |  |
| Maximum Forward Voltage at 15A per leg  | $V_F$           | 0.7            |                | 0.8            |                | 0.85           |                | 0.92            |                 | V                             |       |  |  |  |  |  |  |
| Maximum DC Reverse Current $T_J=25^{\circ}\text{C}$<br>at Rated DC Blocking Voltage $T_J=125^{\circ}\text{C}$ | $I_R$           | 0.05<br>20     |                |                |                |                |                |                 |                 | mA                            |       |  |  |  |  |  |  |
| Typical Thermal Resistance  | $R_{\theta JC}$ | 1.4            |                |                |                |                |                |                 |                 | $^{\circ}\text{C} / \text{W}$ |       |  |  |  |  |  |  |
| Operating Junction and Storage Temperature Range  | $T_J, T_{STG}$  | -55 to + 150   |                |                |                |                |                | -55 to + 175    |                 | $^{\circ}\text{C}$            |       |  |  |  |  |  |  |

# MBRF3040CT~MBRF30200CT


## RATING AND CHARACTERISTIC CURVES

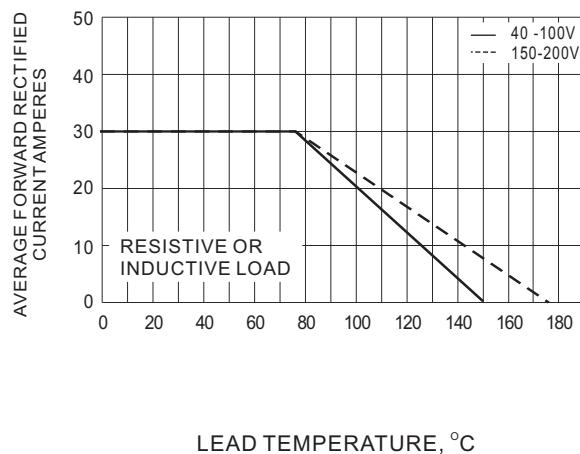


**Fig.1- FORWARD CURRENT DERATING CURVE**

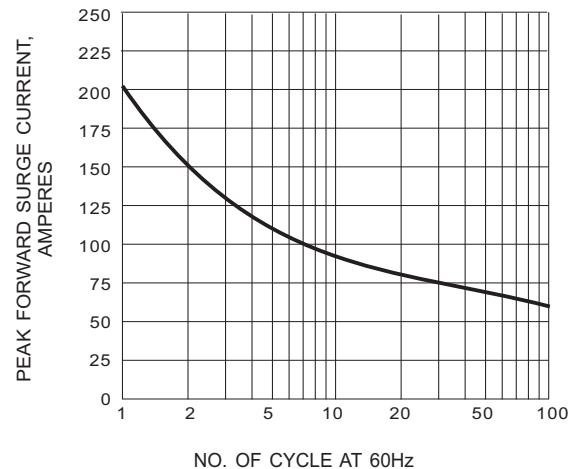

**Fig.2- MAXIMUM NON-REPETITIVE SURGE CURRENT**

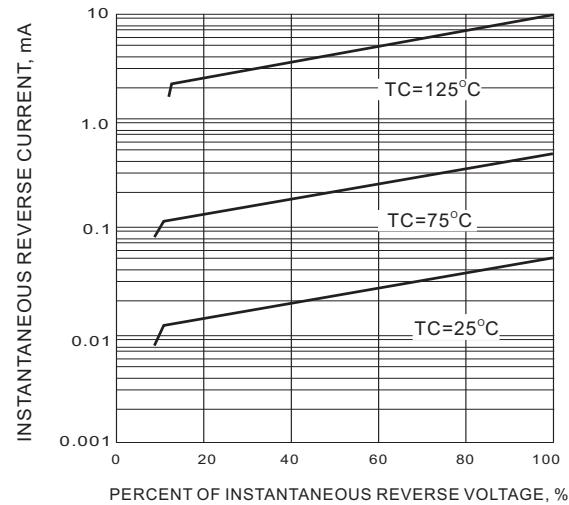

**Fig.3- TYPICAL REVERSE CHARACTERISTIC**

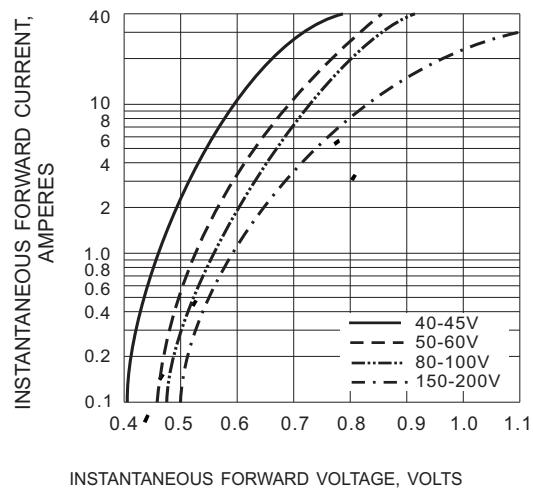

**Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC**