

SL1545 THRU SL15200


Reverse Voltage - 45 to 200 Volts Forward Current -15.0 Ampere

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Features

- ◆ Schottky Barrier Chip
- ◆ High Thermal Reliability
- ◆ Patented Super Barrier Rectifier Technology
- ◆ High Forward Surge Capability
- ◆ Ultra Low Power Loss, High Efficiency
- ◆ Excellent High Temperature Stability
- ◆ Plastic material-UL flammability 94V-0

TO-277

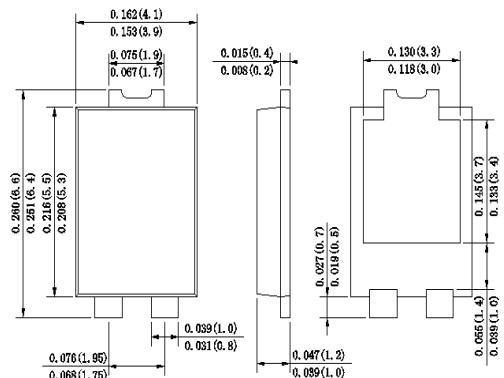

Mechanical Data

Case : JEDEC TO-277 Molded plastic body

Terminals : Plated Leads Solderable per MIL-STD-202, Method 208

Polarity : Polarity symbol marking on body

Mounting Position: Any

Weight : 0.003 ounce, 0.092 grams

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	SL 1545	SL 1550	SL 1560	SL 1580	SL 15100	SL 15150	SL 15200	UNIT
Marking Code									
Maximum repetitive peak reverse voltage	V _{RRM}								
Maximum working peak reverse voltage	V _{RWM}	45	50	60	80	100	150	200	V
Maximum DC blocking voltage	V _{DC}								
RMS Reverse voltage	V _{RMS}	32	35	42	56	70	105	140	V
Average Rectified Output Current	I _(O)					15			A
Non-Repetitive Peak Forward Surge 8.3ms Single Half Sine-Wave Superimposed on rated load (JEDEC Method)	I _{FSM}					275			A
Forward Voltage Drop at 15.0A T _A =25°C	V _F		0.48	0.55	0.75		0.80		V
Peak reverse current at rated DC blocking voltage	I _R	T _A =25°C T _A =125°C			0.3 15				mA
Typical thermal resistance Junction to Ambient	R _{θJA} R _{θJL}				80 15				°C/W
Operating junction and storage temperature range	T _{J,T_{STG}}				-55 to +150				°C

Note: 1. Valid provided that are kept at ambient temperature at a distance of 9.5mm from the case.

2. Fr-4pcb.2oz.Copper, minimum recommend pad layout .18.8mm×14.4mm. Anode pad dimensions 5.6mm×14.4mm.

SL1545 THRU SL15200

Reverse Voltage - 45 to 200 Volts Forward Current -15.0 Ampere

Ratings And Characteristic Curves

Fig.1 - Forward Current Derating Curve

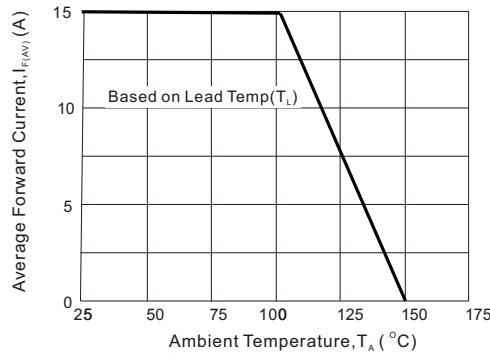


Fig2 : Instantaneous Forward Voltage

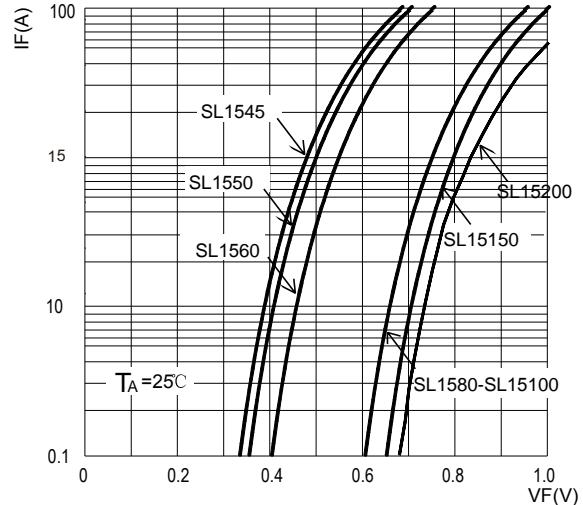


Fig3: Surge Forward Current Capability


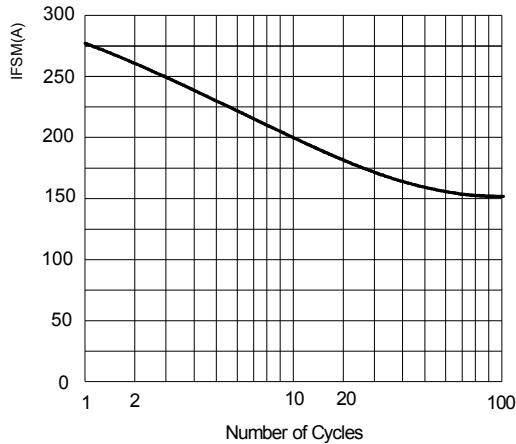


Fig4: Typical Reverse Characteristics

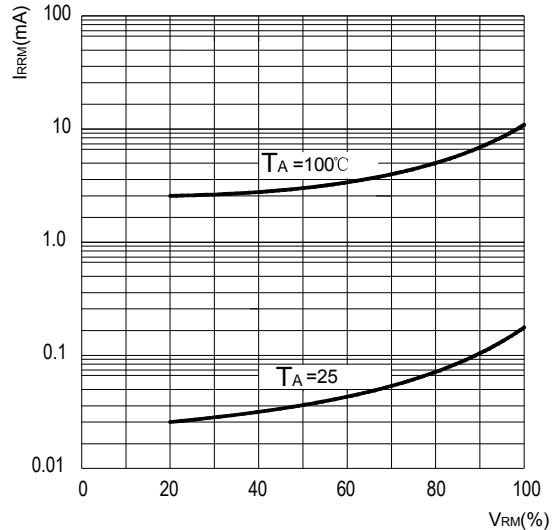

The curve above is for reference only.