

# G801 THRU G810



## GLASS PASSIVATED RECTIFIERS

Reverse Voltage - 100 to 1000 V

Forward Current - 8.0 A

### FEATURES

- High current capability
- Low forward voltage drop
- Low power loss, high efficiency
- High surge capability
- High temperature soldering guaranteed
- Mounting position: any



### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified

| CHARACTERISTICS   | TO-251          | G801VS     | G802VS | G804VS | G806VS | G808VS | G810VS | Units |
|---|-----------------|------------|--------|--------|--------|--------|--------|-------|
|   | TO-252          | G801DS     | G802DS | G804DS | G806DS | G808DS | G810DS |       |
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$       | 100        | 200    | 400    | 600    | 800    | 1000   | V     |
| Maximum RMS voltage   | $V_{RMS}$       | 70         | 140    | 280    | 420    | 560    | 700    | V     |
| Maximum DC Blocking Voltage   | $V_{DC}$        | 100        | 200    | 400    | 600    | 800    | 1000   | V     |
| Maximum Average Forward Rectified Current   | $I_{F(AV)}$     | 8.0        |        |        |        |        |        | A     |
| Peak Forward Surge Current, 8.3ms<br>Single Half Sine-wave Superimposed<br>on Rated Load (JEDEC method) | $I_{FSM}$       | 160        |        |        |        |        |        | A     |
| Max Instantaneous Forward Voltage at 8 A DC   | $V_F$           | 1.1        |        |        |        |        |        | V     |
| Maximum DC Reverse Current $T_a = 25^\circ C$<br>at Rated DC Reverse Voltage $T_a = 125^\circ C$        | $I_R$           | 5<br>500   |        |        |        |        |        | uA    |
| Typical Junction Capacitance <sup>(1)</sup>   | $C_j$           | 50         |        |        |        |        |        | pF    |
| Typical Thermal Resistance <sup>(2)</sup>   | $R_{\theta JC}$ | 25         |        |        |        |        |        | °C/W  |
| Operating Junction Temperature Range  | $T_j$           | -55 ~ +150 |        |        |        |        |        | °C    |
| Storage Temperature Range   | $T_{stg}$       | -55 ~ +150 |        |        |        |        |        | °C    |


(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 10cmX10cmX1mm copper pad areas.


**Fig.1 Forward Current Derating Curve**

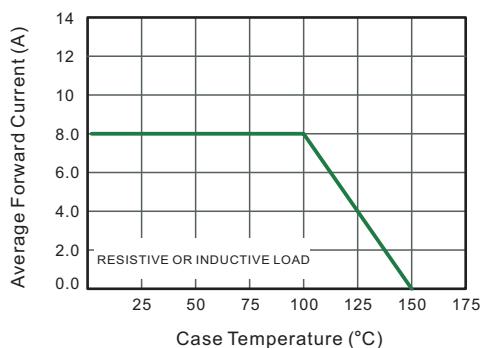


**Fig.2 Typical Instantaneous Reverse Characteristics**

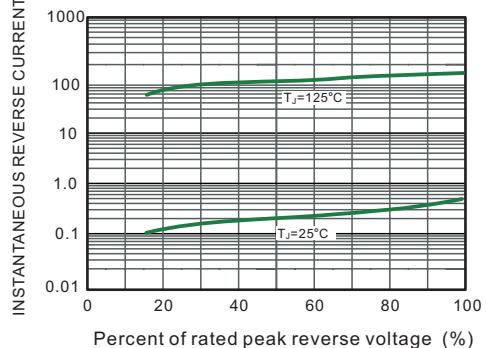


**Fig.3 Typical Forward Characteristic**

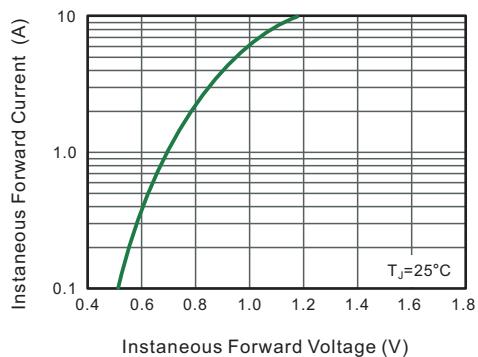


**Fig.4 Typical Junction Capacitance**

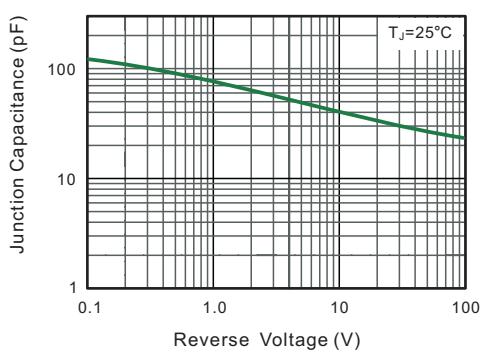


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

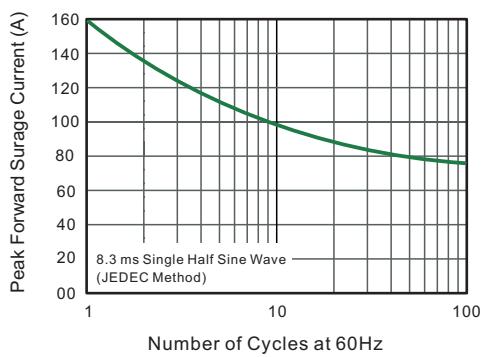


**Fig.6- Typical Transient Thermal Impedance**

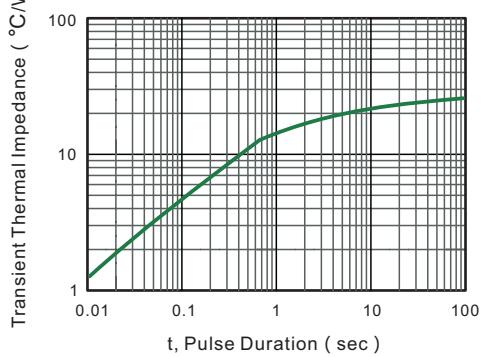

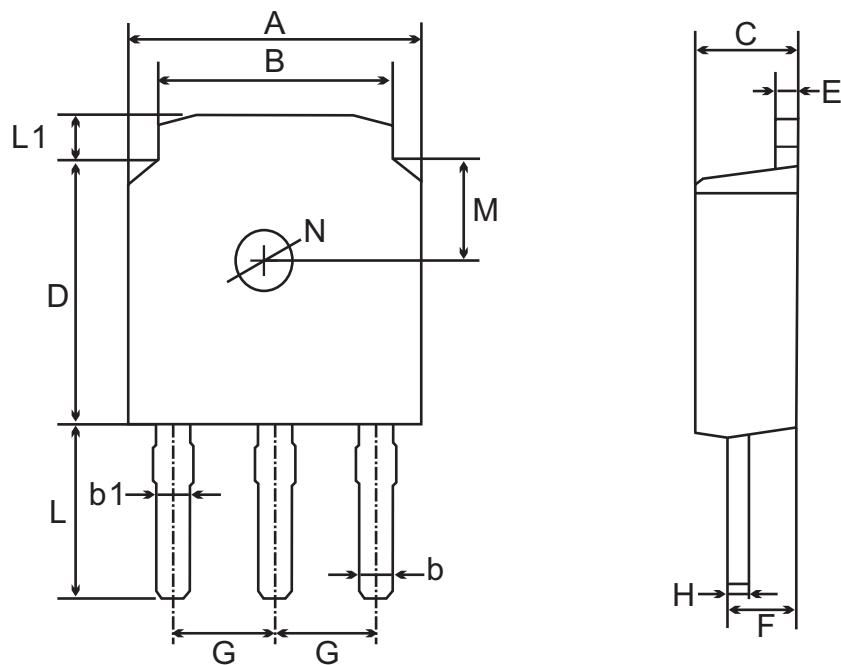TO-251(D-PAK) Package Outline Dimensions

TO-251(I-PAK) mechanical data

| UNIT |     | A   | B   | b   | b1   | C   | D   | E   | F   | G               | H    | L   | L1  | M              | N              |
|------|-----|-----|-----|-----|------|-----|-----|-----|-----|-----------------|------|-----|-----|----------------|----------------|
| mm   | max | 6.7 | 5.5 | 0.8 | 0.9  | 2.5 | 6.3 | 0.6 | 1.8 | 2.29<br>TYPICAL | 0.55 | 4.3 | 1.2 | 1.8<br>TYPICAL | 1.3<br>TYPICAL |
|      | min | 6.3 | 5.1 | 0.3 | 0.76 | 2.1 | 5.9 | 0.4 | 1.3 |                 | 0.45 | 3.9 | 0.8 |                |                |
| mil  | max | 264 | 217 | 31  | 35   | 98  | 248 | 24  | 71  | 90<br>TYPICAL   | 22   | 169 | 47  | 71<br>TYPICAL  | 51<br>TYPICAL  |
|      | min | 248 | 201 | 12  | 30   | 83  | 232 | 16  | 51  |                 | 18   | 154 | 31  |                |                |

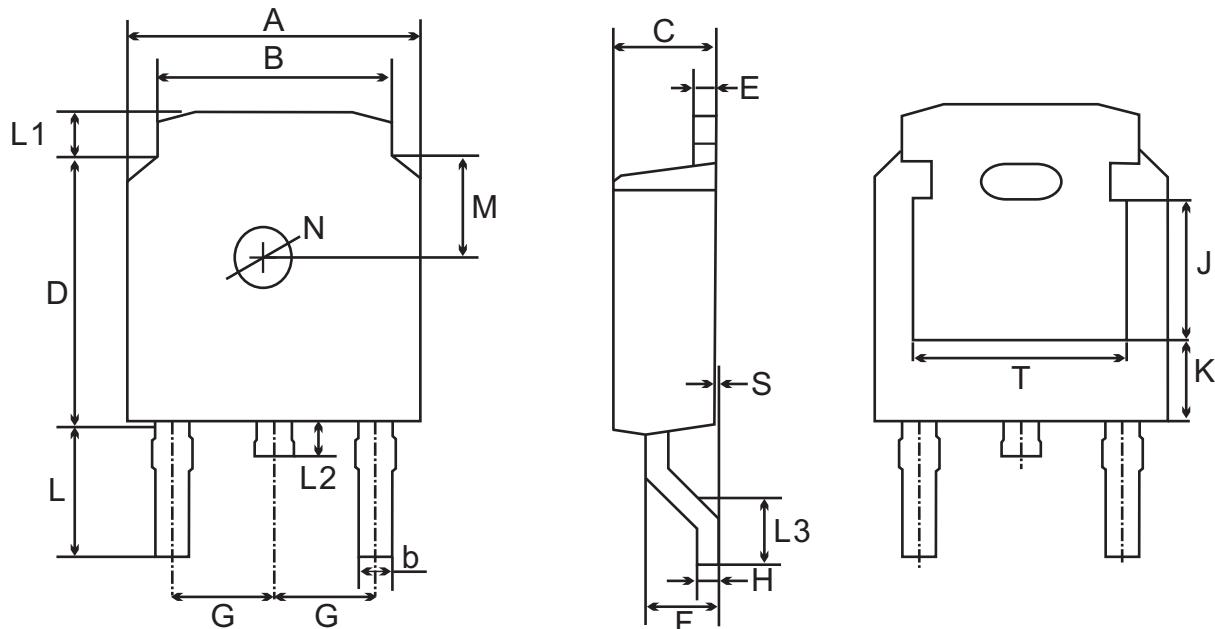TO-252(D-PAK) Package Outline Dimensions

TO-252(D-PAK) mechanical data

| UNIT |     | A   | B   | b   | C   | D   | E   | F   | G               | H    | L   | L1  | L2  | L3   | S   | M              | N              | J            | K            | T            |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----------------|------|-----|-----|-----|------|-----|----------------|----------------|--------------|--------------|--------------|
| mm   | max | 6.7 | 5.5 | 0.8 | 2.5 | 6.3 | 0.6 | 1.8 | 2.29<br>TYPICAL | 0.55 | 3.1 | 1.2 | 1.0 | 1.75 | 0.1 | 1.8<br>TYPICAL | 1.3<br>TYPICAL | 3.16<br>ref. | 1.80<br>ref. | 4.83<br>ref. |
|      | min | 6.3 | 5.1 | 0.3 | 2.1 | 5.9 | 0.4 | 1.3 |                 | 0.45 | 2.7 | 0.8 | 0.6 | 1.40 | 0.0 |                |                |              |              |              |
| mil  | max | 264 | 217 | 31  | 98  | 248 | 24  | 71  | 90<br>TYPICAL   | 22   | 122 | 47  | 39  | 69   | 4   | 71<br>TYPICAL  | 51<br>TYPICAL  | 124<br>ref.  | 71<br>ref.   | 190<br>ref.  |
|      | min | 248 | 201 | 12  | 83  | 232 | 16  | 51  |                 | 18   | 106 | 31  | 24  | 55   | 0   |                |                |              |              |              |