


SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage - 100 V

Forward Current - 10 A

FEATURES

- Low power loss, high efficiency
- Low forward voltage drop
- High surge capability
- High temperature soldering guaranteed
- Mounting position: any



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

PARAMETER	TO-251	SL10100VS		Units
	TO-252	SL10100DS		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100		V
Maximum RMS voltage	V_{RMS}	70		V
Maximum DC Blocking Voltage	V_{DC}	100		V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	10		A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150		A
Typical Junction Capacitance ⁽¹⁾	C_j	620		pF
Typical Thermal Resistance ⁽²⁾	$R_{\theta JA}$	45		°C/W
Operating Junction Temperature Range	T_j	-55 ~ +150		°C
Storage Temperature Range	T_{stg}	-55 ~ +150		°C

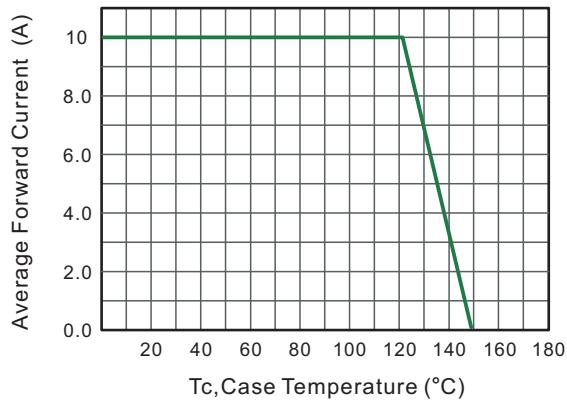
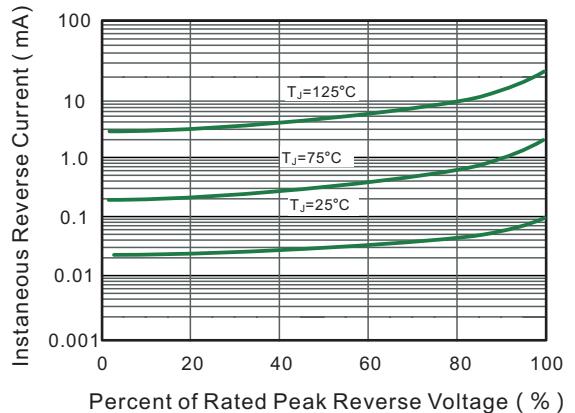
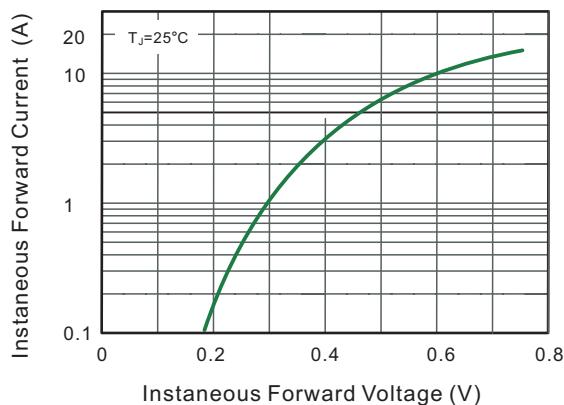
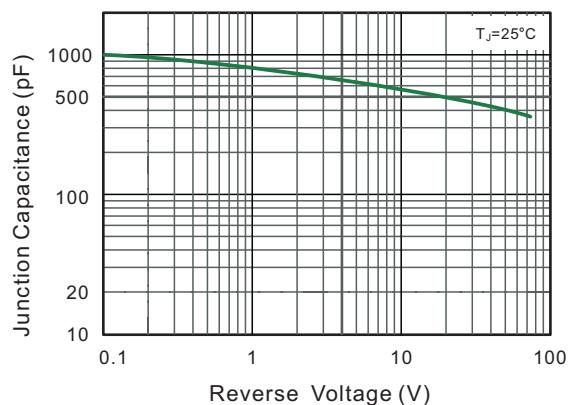
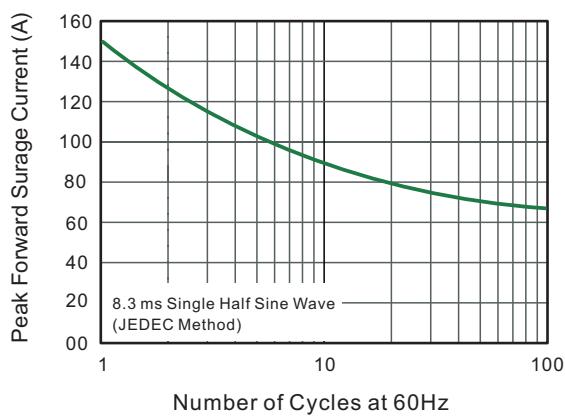
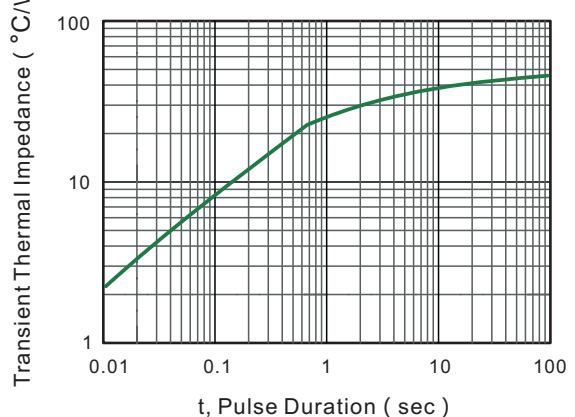
(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C.

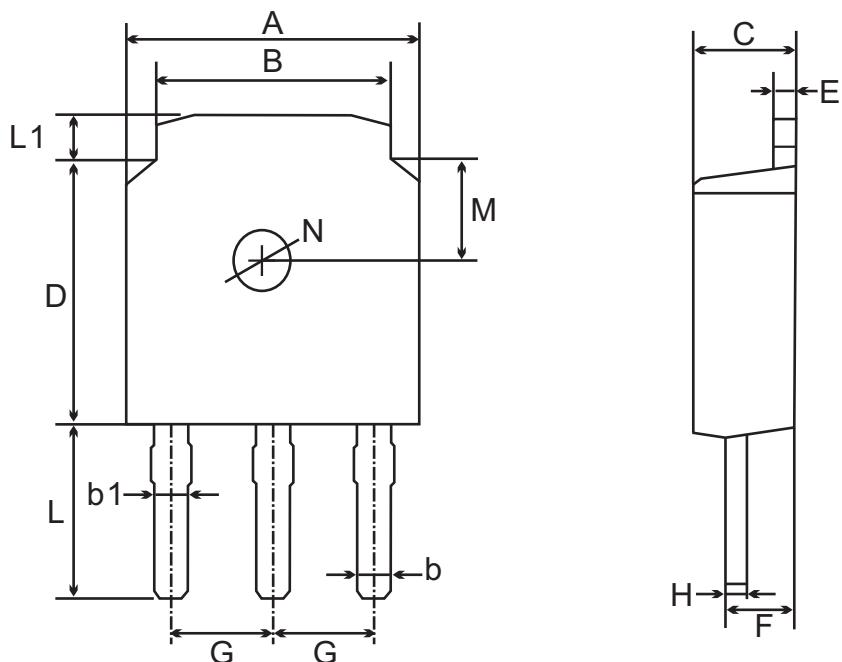
(2) Mounted on infinite heat sink.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	Units
Breakdown voltage per diode	V_{BR}	$I_R = 0.5\text{mA}$	100	-	-	V
Instantaneous forward voltage per diode	V_F	$I_F = 2\text{A}$	-	0.43	-	V
		$I_F = 5\text{A} \quad T_j = 25^\circ\text{C}$	-	0.49	-	
		$I_F = 10\text{A}$	-	0.60	0.65	
		$I_F = 2\text{A}$	-	0.38	-	
Reverse current per diode	I_R	$I_F = 5\text{A} \quad T_j = 125^\circ\text{C}$	-	0.45	-	
		$I_F = 10\text{A}$	-	0.58	-	
Reverse current per diode	I_R	$V_R = 70\text{V}$	-	5	-	uA
		$V_R = 100\text{V} \quad T_j = 25^\circ\text{C}$	-	5.5	50	uA
					-	mA

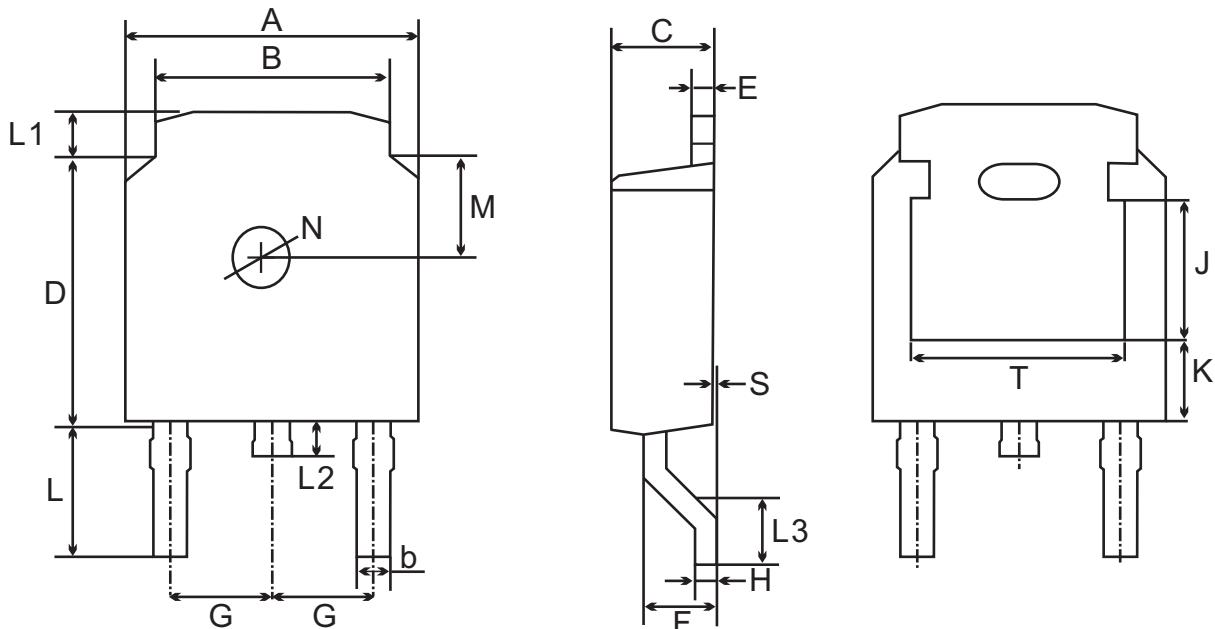
Fig.1 TYPICAL FORWARD CURRENT DERATING CURVE**Fig.2 Typical Reverse Characteristics****Fig.3 Typical Forward Characteristic****Fig.4 Typical Junction Capacitance****Fig.5 Maximum Non-Repetitive Peak Forward Surge Current****Fig.6- Typical Transient Thermal Impedance**

TO-251(D-PAK) Package Outline Dimensions

TO-251(I-PAK) mechanical data

UNIT		A	B	b	b1	C	D	E	F	G	H	L	L1	M	N
mm	max	6.7	5.5	0.8	0.9	2.5	6.3	0.6	1.8	2.29 TYPICAL	0.55	4.3	1.2	1.8 TYPICAL	1.3 TYPICAL
	min	6.3	5.1	0.3	0.76	2.1	5.9	0.4	1.3		0.45	3.9	0.8		
mil	max	264	217	31	35	98	248	24	71	90 TYPICAL	22	169	47	71 TYPICAL	51 TYPICAL
	min	248	201	12	30	83	232	16	51		18	154	31		

TO-252(D-PAK) Package Outline Dimensions



TO-252(D-PAK) mechanical data

UNIT		A	B	b	C	D	E	F	G	H	L	L1	L2	L3	S	M	N	J	K	T
mm	max	6.7	5.5	0.8	2.5	6.3	0.6	1.8	2.29 TYPICAL	0.55	3.1	1.2	1.0	1.75	0.1	1.8 TYPICAL	1.3 TYPICAL	3.16 ref.	1.80 ref.	4.83 ref.
	min	6.3	5.1	0.3	2.1	5.9	0.4	1.3		0.45	2.7	0.8	0.6	1.40	0.0					
mil	max	264	217	31	98	248	24	71	90 TYPICAL	22	122	47	39	69	4	71 TYPICAL	51 TYPICAL	124 ref.	71 ref.	190 ref.
	min	248	201	12	83	232	16	51		18	106	31	24	55	0					