

SS52B THRU SS520B

Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 20 to 200V

Forward Current - 5.0A

FEATURES

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: SMB
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.1g / 0.0034oz

Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Parameter	Symbols	SS52B	SS54B	SS56B	SS58B	SS510B	SS512B	SS515B	SS520B	Units				
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V				
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	84	105	140	V				
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V				
Maximum Average Forward Rectified Current	$I_{F(AV)}$	5.0							A					
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150							A					
Max Instantaneous Forward Voltage at 5 A	V_F	0.55		0.70		0.85		0.85		V				
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Reverse Voltage $T_a = 100^\circ\text{C}$	I_R	1.0 50		0.3 25		0.3 25		0.3 25		mA				
Typical Junction Capacitance ⁽¹⁾	C_j	500		300		300		300		pF				
Typical Thermal Resistance ⁽²⁾	$R_{\theta JA}$	50							$^\circ\text{C/W}$					
Operating Junction Temperature Range	T_j	-55 ~ +150							$^\circ\text{C}$					
Storage Temperature Range	T_{stg}	-55 ~ +150							$^\circ\text{C}$					

(1) Measured at 1MHz and applied reverse voltage of 4 V D.C.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

SS52B THRU SS520B

Fig.1 Forward Current Derating Curve

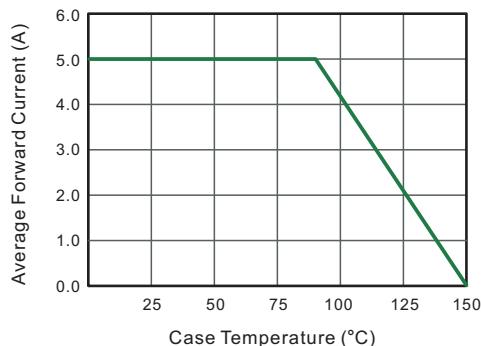


Fig.2 Typical Reverse Characteristics

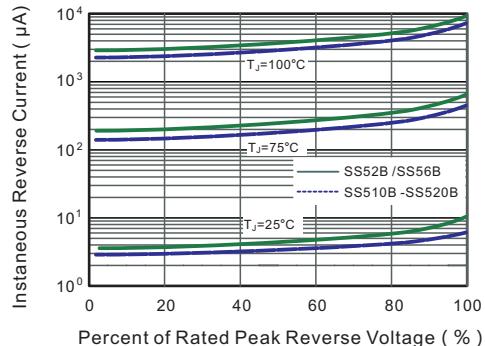


Fig.3 Typical Forward Characteristic

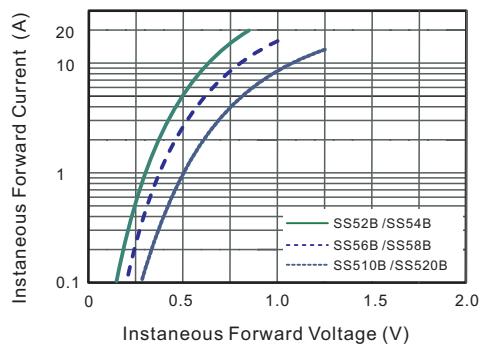


Fig.4 Typical Junction Capacitance

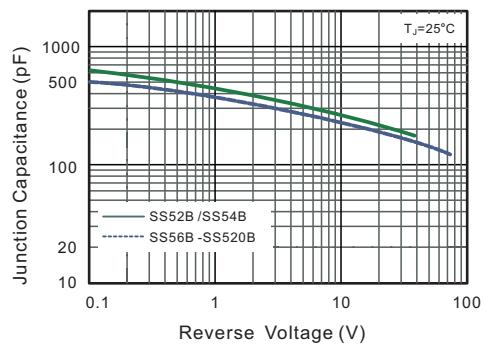


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


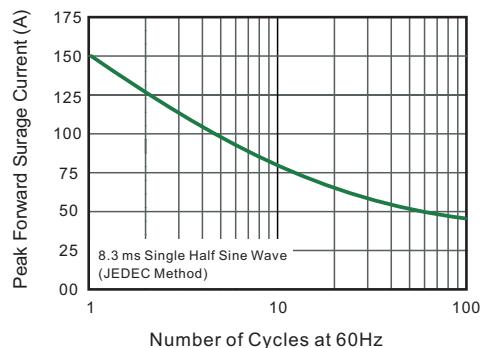


Fig.6- Typical Transient Thermal Impedance

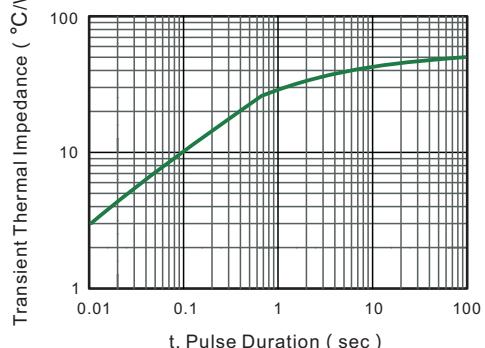


SS52B THRU SS520B

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SMB

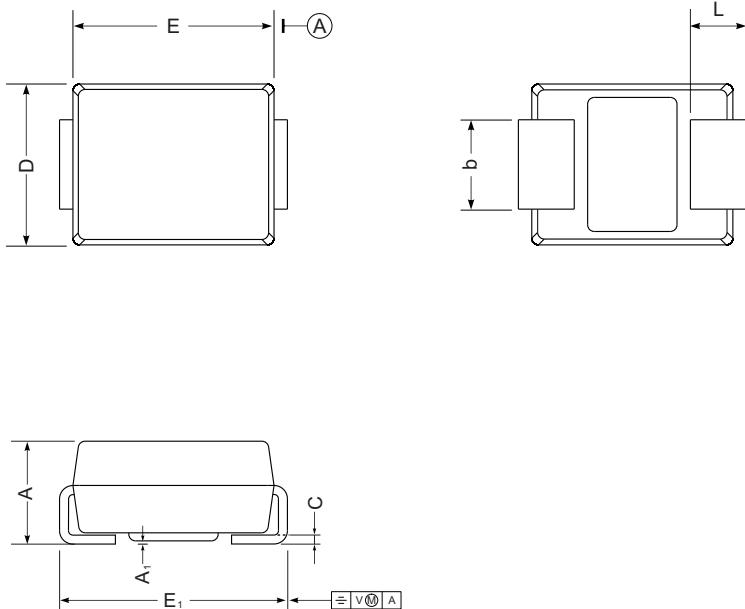

SMB mechanical data

UNIT		A	E	D	E ₁	A ₁	L	C	b
mm	max	2.44	4.70	3.94	5.59	0.20	1.5	0.305	2.2
	min	2.13	4.06	3.3	5.08	0.05	0.8	0.152	1.9
mil	max	96	185	155	220	7.9	59	12	87
	min	84	160	130	200	2.0	32	6	75

The recommended mounting pad size

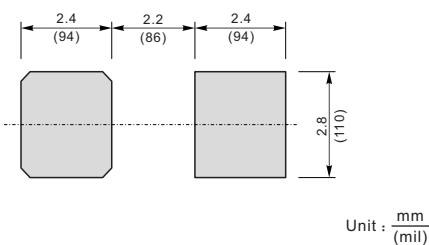

Marking

Type number	Marking code
SS52B	SS52
SS54B	SS54
SS56B	SS56
SS58B	SS58
SS510B	SS510
SS512B	SS512
SS515B	SS515
SS520B	SS520